
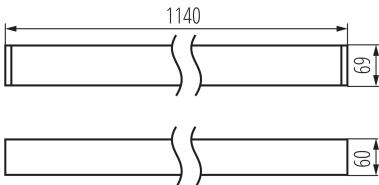


### Linear LED luminaire



#### GENERAL DATA:

**Colour:** white  
**Place of assembly:** ceiling mounted  
**Place of application:** Indoors  
**Minimum distance from the illuminated object :** 0,5m  
**Compatible with a dimmer :** no  
**Fixture lighting direction:** down  
**Length [mm]:** 1140  
**Width [mm]:** 60  
**Height [mm]:** 69  
**Integrated LED light source :** yes

#### TECHNICAL DATA:


**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 18  
**Class of protection against electric shock :** I  
**Lampshade material:** plastic  
**Diode type:** LED SMD  
**Luminous flux [lm]:** 2140  
**Correlated colour temperature [K]:** 3000  
**Colour consistency in McAdam ellipses :**  $\leq 3$   
**Colour rendering index:** 80  
**Service life [h]:** 50000  
**Luminous-flux-retention factor at the end of rated service life :** L90B10  
**Number of on/off cycles:**  $\geq 30000$   
**Lighting angle [°]:** X85/Y95  
**Luminous efficiency of the lamp [lm/W]:** 119  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Shade type:** matt  
**Enclosure material:** aluminum alloy  
**Connection type:** Self-clamping block  
**Range of sections of wires used [mm<sup>2</sup>]:** 1,5÷2,5  
**Lamp-heating time [s]:**  $\leq 1$   
**Lamp-ignition time [s]:**  $\leq 0,5$   
**IP class:** 20

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website


## 35589 AL-MS-WW-MAT-W-NT

### Linear LED luminaire

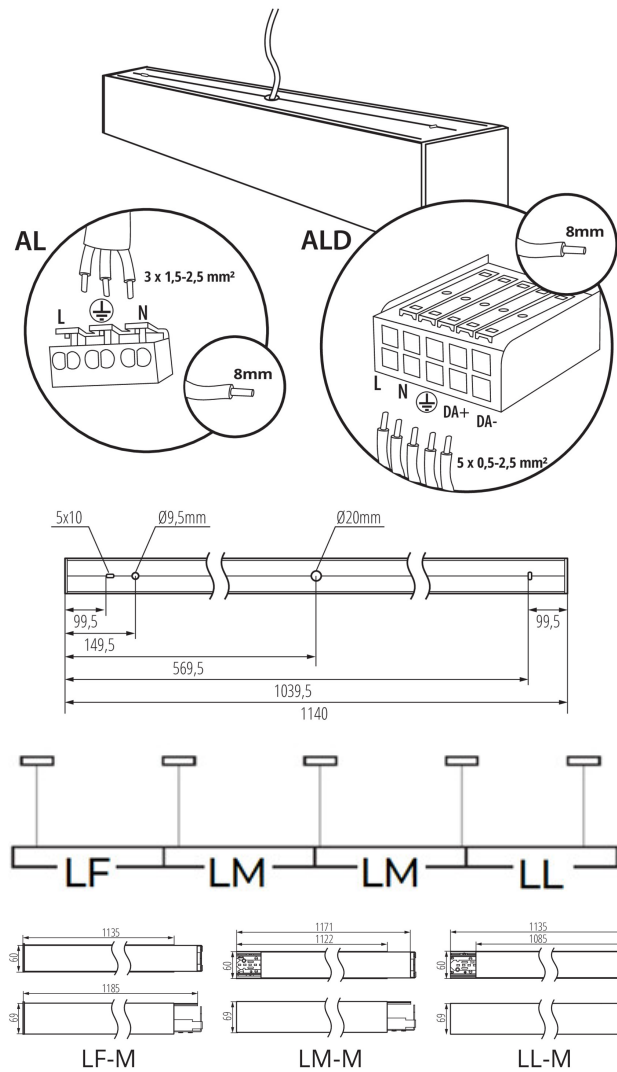

KANLUX S.A. (kat 35589) AL-MS-WW-MAT-W-NT / Krzywa rozsytu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35589) AL-MS-WW-MAT-W-NT  
Lampy: 1 x AL-MS-WW-MAT

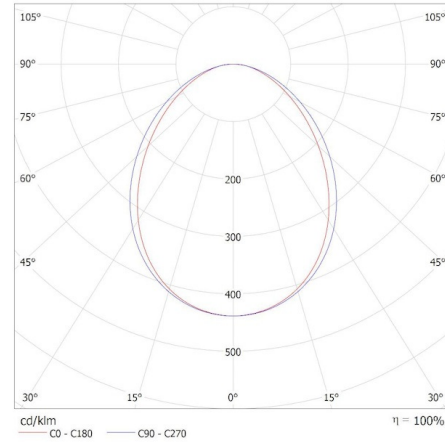

Linear LED luminaire

### ACCESSORIES

32540

ALIN CORD 1F-W

Power supply terminal for ALIN luminaires and tracks, 1-phase, white, 150 cm



32541

ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32542

ALIN CORD 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, silver 150 cm



07871

ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

