


15099 RANGO MINI R7S SMD-WW

LED light source

5907540962568

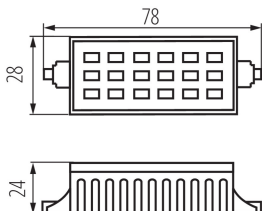

LED source Kanlux RANGO is the perfect energy-saving solution for all types of lamps and floodlights with R7s screw.


GENERAL DATA:

Colour: white
Lamp designed for decorative lighting: no
Compatible with a dimmer: no
Length [mm]: 78
Width [mm]: 28
Height [mm]: 78
Depth [mm]: 24
Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp-power factor: 0.5
Rated power [W]: 6
Material: plastic
Lampshade material: glass
Light source: J
Diode type: LED SMD
Total rated luminous flux [lm]: 600
Useful luminous flux of the light source Φ_{use} [lm]: 510
Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)
Colour temperature: Warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Cap: R7s
Rated lamp-service life [h]: 20000
Number of on/off cycles: ≥ 20000
Rated beam angle [°]: 110
Rated light level [°]: 110
Lamp rated current [mA]: 45
Annual power consumption [kWh/1000h]: 6
Luminous efficiency of the lamp [lm/W]: 100
Ignition time [s]: $\leq 0,5$
Lamp-heating time to 60% of the full luminous flux [s]: Negligible
Lamp-heating time to 95% [s]: < 2
Lamp premature-failure indicator: $< 5\%$ po 1000h
Lamp service life factor after the period of 6000h [%]: ≥ 90

LED light source

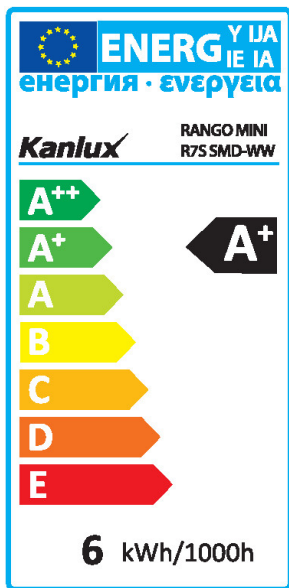

Luminous flux retention factor at the end of rated service life [%]: ≥ 70

Luminous flux retention factor after the period of 6000h [%]: ≥ 80

Declaration of equality in power rating [W]: 42

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 46

Grammage [g]: 82.2

Length of a unit pack [cm]: 13

Width of a unit pack [cm]: 3.5

Height of a unit pack [cm]: 15.5


Weight of a cardboard box [kg]: 8.22

Width of a cardboard box [cm]: 23

Height of a cardboard box [cm]: 36.5

Length of a cardboard box [cm]: 78.5

Volume of a cardboard box [m³]: 0.065901

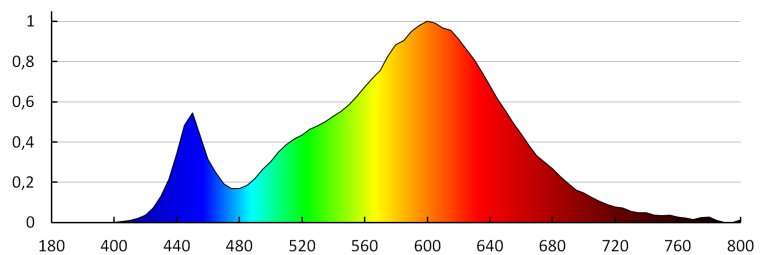

KANLUX S.A. (kat 15099) RANGO MINI R7S SMD-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 15099) RANGO MINI R7S SMD-WW
 Lampy: 1 x RANGO MINI R7S SMD-WW

