


LED light source

5905339234919











Kanlux IDO are candle-shaped sources with a E14 screw. These LED sources are characterised by large illumination angle (210^o) and their decorative shape.

GENERAL DATA:

Colour: white Lamp designed for decorative lighting: Not applicable Compatible with a dimmer: no Width [mm]: 38 Height [mm]: 133 Diameter [mm]: 38 Depth [mm]: 38 Mercury content: no


TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp-power factor: 0.5 Rated power [W]: 6.5 Material: plastic Light source: C37 Diode type: LED SMD Total rated luminous flux [lm]: 600 Useful luminous flux of the light source **Φ**use [lm]: 600 Useful luminous flux of the light source **Quse** [lm]: in sphere (360°) Colour temperature: white Correlated colour temperature [K]: 4000 **Colour consistency in McAdam ellipses**: ≤6 Colour rendering index: 80 Cap: E14 Rated lamp-service life [h]: 20000 Number of on/off cycles: ≥15000 Rated beam angle [°]: 210 Rated light level [°]: 210 Lamp rated current [mA]: 54 Annual power consumption [kWh/1000h]: 7 Luminous efficiency of the lamp [lm/W]: 92 Ignition time [s]: $\leq 0,5$ Lamp-heating time to 60% of the full luminous flux [s]: Negligible Lamp-heating time to 95% [s]: <2 Lamp premature-failure indicator: <5% po 1000h Lamp service life factor after the period of 6000h [%]: ≥90





LED light source






Luminous flux retention factor at the end of rated service life [%]: \geq 70 Luminous flux retention factor after the period of 6000h [%]: \geq 80 Declaration of equality in power rating [W]: 48 Light source shape: swieczka

LOGISTIC DATA:

Packaging method: 100 Number of units in the secondary packaging: 1 Number of units in the packaging: 100 Net unit weight [g]: 46 Grammage [g]: 62.8 Length of a unit pack [cm]: 4 Width of a unit pack [cm]: 4 Height of a unit pack [cm]: 14 Weight of a cardboard box [kg]: 6.28 Width of a cardboard box [cm]: 22 Height of a cardboard box [cm]: 31 Length of a cardboard box [cm]: 42.5 Volume of a cardboard box [m³]: 0.028985

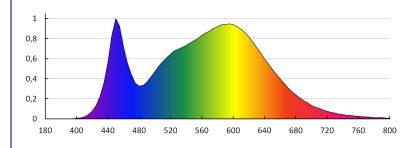

KANLUX S.A. (kat 23491) IDO 6,5W T SMD E14-NW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 23491) IDO 6,5WT SMD E14-NW Lamps: 1 x IDO 6,5WT SMD E14-NW

