


23615 KDB-S36T

KDB-series distribution board

5905339236159

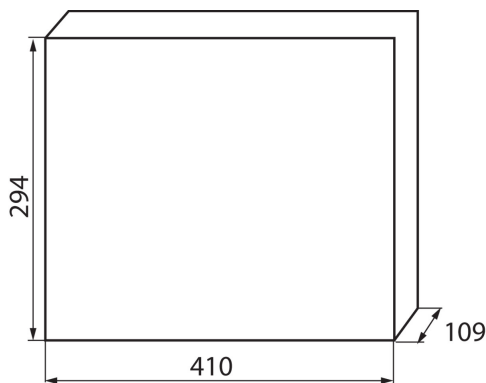

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

GENERAL DATA:

Colour: white / blue
Door colour: blue
Place of assembly: wall mounted
Norm: PN-EN 62208
Length [mm]: 410
Width [mm]: 109
Height [mm]: 294

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC
Rated current [A]: 63
Rated frequency [Hz]: 50
Class of protection against electric shock: II
Material: plastic
Number of modules: 2x18P
Temperature resistance [°C]: 650
IK class: 07
IP class: 30
number of rows: 2

LOGISTIC DATA:

Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1660
Grammage [g]: 2228
Length of a unit pack [cm]: 58.5
Width of a unit pack [cm]: 32
Height of a unit pack [cm]: 44
Weight of a cardboard box [kg]: 11.14
Width of a cardboard box [cm]: 32
Height of a cardboard box [cm]: 44
Length of a cardboard box [cm]: 58.5
Volume of a cardboard box [m³]: 0.082368

23615 KDB-S36T

KDB-series distribution board