


LED dustproof lighting fitting

5905339286345



GENERAL DATA:

Colour: grey
Place of assembly: ceiling mounted, wall mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Possibility of fixture-loop-through connection: yes
Compatible with a dimmer: no
Replaceable light source: no
Length [mm]: 1180
Width [mm]: 80
Height [mm]: 70
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50/60
Maximum power [W]: 37
Class of protection against electric shock: I
Lampshade material: PC
Diode type: LED SMD
Luminous flux [lm]: 5200
Colour temperature: white
Colour temperature [K]: 4000
Colour uniformity [SDCM]: ≤3
Colour-rendering index Ra: ≥80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥30000
Lighting angle [°]: X75/Y95
Luminous efficiency of the lamp [lm/W]: 141
Ambient temperature range to which the product can be exposed: -25÷40
Shade type: prismatic, asymmetric
Enclosure material: PC
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
The fixture set includes built-in LED's with the following energy classes: A++,A+,A
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
Maximum number of loop-through-connected fixtures: 10
IK class: 08
IP class: 65

LOGISTIC DATA:


Date of issue: 26.06.2020, 22:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

LED dustproof lighting fitting

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging: 1
Number of units in the packaging: 1
Net unit weight [g]: 1750
Grammage [g]: 1930
Length of a unit pack [cm]: 120
Width of a unit pack [cm]: 9
Height of a unit pack [cm]: 7
Weight of a cardboard box [kg]: 1.93
Width of a cardboard box [cm]: 9
Height of a cardboard box [cm]: 7
Length of a cardboard box [cm] : 120
Volume of a cardboard box [m³]: 0.00756

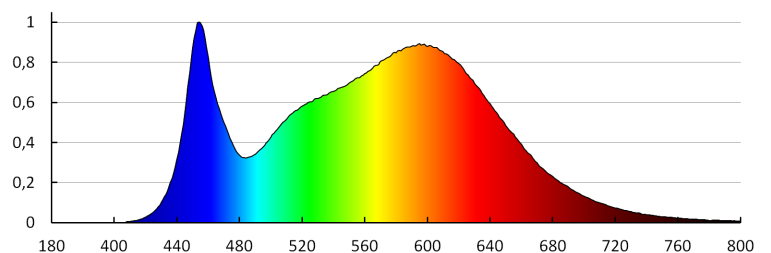

KANLUX S.A. (kat 28634) FT1200 37W-840-ASY / LDC (Polar)

Luminaire: KANLUX S.A. (kat 28634) FT1200 37W-840-ASY
Lamps: 1 x FT1200 37W-840-ASY

