


33205 ANTEM LED 10W-NW-SE B

LED floodlight

5905339332059



Kanlux ANTEM is a series of LED floodlights. These floodlights are above all easy to connect, and thanks to the integrated junction box you can also avoid unaesthetic cable connections. Kanlux ANTEM LED series provides a wide range of power options, from 10 W to 100 W, as well as versions with and without motion sensors. A milky lampshade with a delicate prism softly disperses light and reduces the glare effect. The version without a motion sensor has a tightness of IP65, while the one with a sensor has a tightness of IP44. The sensor can be adjusted in terms of light duration, light intensity and detection range.

GENERAL DATA:

Colour: black

Place of assembly: wall mounted, ceiling mounted, surface mounted

Place of application: outdoors

Minimum distance from the illuminated object: 1m

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Width [mm]: 110

Height [mm]: 146

Depth [mm]: 63

Sensitivity regulation: yes

Mercury content: no

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 10

Class of protection against electric shock: I

Diode type: LED SMD

Luminous flux [lm]: 800

Useful luminous flux of the light source Φ_{use} [lm]: 730

Useful luminous flux of the light source Φ_{use} [lm]: w szerokim stożku (120°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 15000

Number of on/off cycles: ≥ 10000

Lighting angle [°]: 100

33205 ANTEM LED 10W-NW-SE B

LED floodlight



Luminous efficiency of the lamp [lm/W]: 80

Ambient temperature range to which the product can be exposed: -20÷35

Enclosure material: aluminum alloy

Protective glass material: Tempered glass

Extension-arm material: Metal

Sensor type: PIR

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1-1,5

Sensor-operation time [second-minute]: 10-10

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

sensor working angle [°]: 120

Illumination-level setpoint by which the sensor detects movement [lx]: 2-2000

The fixture is movable vertically [°]: 180

IP class: 44

Sensor range[m]: max 10

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging : 1

Number of units in the packaging: 20

Net unit weight [g]: 250

Grammage [g]: 322

Length of a unit pack [cm]: 12.5

Width of a unit pack [cm]: 6.5

Height of a unit pack [cm]: 17.5


Weight of a cardboard box [kg]: 6.44

Width of a cardboard box [cm]: 35

Height of a cardboard box [cm]: 26.5

Length of a cardboard box [cm]: 37

Volume of a cardboard box [m³]: 0.034318

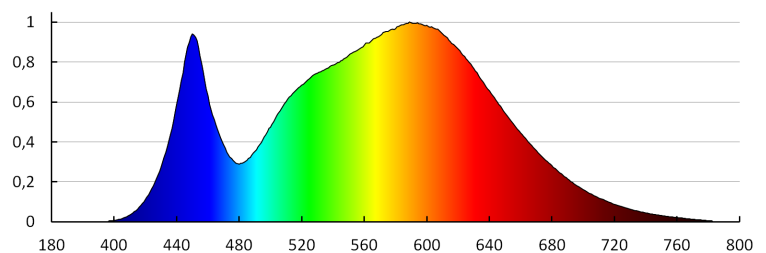

33205 ANTEM LED 10W-NW-SE B

LED floodlight

