

LED tape


5905339333162



up to

120 $\frac{\text{lm}}{\text{W}}$

24V

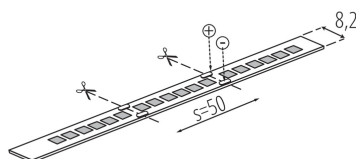

Kanlux L120 LED strip that's two IP rates, IP00 and IP65 - for places where the tape is exposed to moisture. IP65 version, does not differ significantly in size from the IP00 version - this is important when mounting in aluminum profiles. Kanlux L120 tapes are high luminous efficiency (120 lm/W) and up to 3 Year warranty.

GENERAL DATA:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 8.2

Height [mm]: 5000

Depth [mm]: 3

Mercury content: no

TECHNICAL DATA:

Rated voltage [V]: 24 DC

Rated power [W]: 1m = 16

Class of protection against electric shock: III

Diode type: LED SMD

Luminous flux [lm]: 1m = 1760

Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 880

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: cold white

Correlated colour temperature [K]: 6000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥ 30000

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

IP class: 65

Possibility of cutting LED strips into segments [cm]: 5

LOGISTIC DATA:

Packaging method: 25

Number of units in the secondary packaging: 25

Number of units in the packaging: 50

Net unit weight [g]: 112

Grammage [g]: 190.8

Length of a unit pack [cm]: 21.5


LED tape



Width of a unit pack [cm]: 1
Height of a unit pack [cm]: 24
Weight of a cardboard box [kg]: 9.54
Width of a cardboard box [cm]: 34
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm]: 51
Volume of a cardboard box [m³]: 0.050286

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website

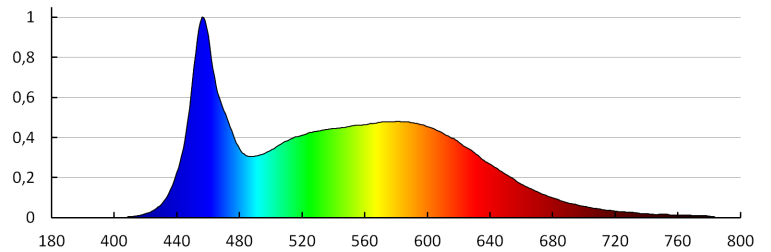

KANLUX S.A. (kat 33316) L120 16W_M 24 IP65-CW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33316) L120 16W_M 24 IP65-CW
Lamps: 1 x L120 16W_M 24 IP65-CW

