


Oprawa LED podtynkowa

5905339371829

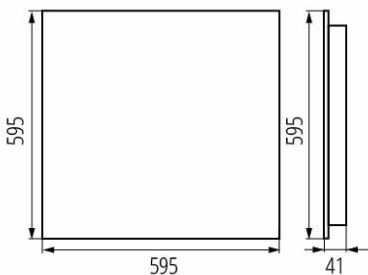

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 41

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 40

Class of protection against electric shock : I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 5250

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses : ≤3

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :
L90B10

Number of on/off cycles: ≥30000

Lighting angle [°]: 80

Luminous efficiency of the lamp [lm/W]: 131

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: louvre / white

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Oprawa LED podtynkowa



Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

KANLUX S.A. (kat 37182) OS-M8D-WW-RX-W-P1 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37182) OS-M8D-WW-RX-W-P1
Lampy: 4 x OS-M8D-WW

