


18121 FOGLER LED 14W-NW

Ceiling-mounted LED light fitting

5905339181213



Kanlux FOGLER LED ceiling light fixture with motion detector is a great solution for lighting staircases, technical rooms in multi-family buildings, storage rooms, basements, garages and driveways in detached houses.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors

Micro-interval between relay contacts: yes

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Height [mm]: 80

Diameter [mm]: 290

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 14

Class of protection against electric shock: I

Lampshade material: PC

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 800

Colour temperature: white

Service life [h]: 20000

Number of on/off cycles: ≥15000

Lighting angle [°]: 110

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: steel

Sensor type: PIR

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 0,5-2,5

Sensor-operation time [second-minute]: 10-5

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

sensor working angle [°]: 360


Illumination-level setpoint by which the sensor detects movement [lx]: 5-2000

IP class: 20

Sensor range[m]: max 6

18121 FOGLER LED 14W-NW

Ceiling-mounted LED light fitting

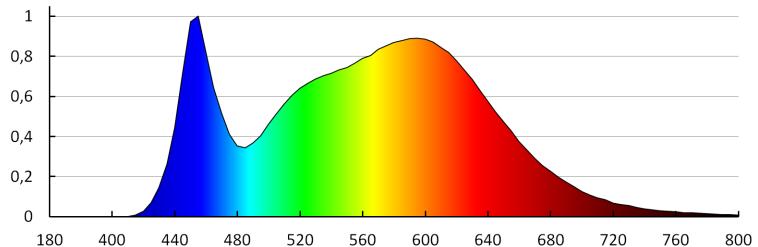PARAMETERS FOR LED AND OLED LIGHT SOURCES:**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤ 6 **Colour rendering index:** 80**LOGISTIC DATA:****Packaging method:** 10**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 10**Net unit weight [g]:** 630**Grammage [g]:** 883**Length of a unit pack [cm]:** 29.5**Width of a unit pack [cm]:** 8.5**Height of a unit pack [cm]:** 29**Weight of a cardboard box [kg]:** 8.83**Width of a cardboard box [cm]:** 46**Height of a cardboard box [cm]:** 33**Length of a cardboard box [cm]:** 61**Volume of a cardboard box [m³]:** 0.092598

KANLUX S.A. (kat 18121) FOGLER LED 14W-NW / Krzywa rozszerzenia światła (biegunowo)

Oprawa: KANLUX S.A. (kat 18121) FOGLER LED 14W-NW
Lampa: 1 x FOGLER LED 14W-NW