


26821 SENZO

PIR motion sensor

5905339268211

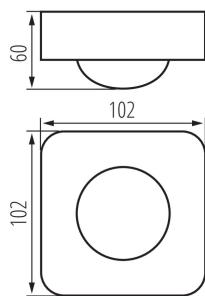

Kanlux SENZO is a PIR movement sensor used in automatic lighting switching systems. The special arrangement of two infrared sensors in Kanlux SENZO allows it to be used in high room installations, such as warehouses or production halls. Its vertical range is as much as 10 meters.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors

Micro-interval between relay contacts: yes

Length [mm]: 102

Width [mm]: 102

Height [mm]: 60

Sensitivity regulation: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Ambient temperature range to which the product can be exposed: 5÷25

Sensor type: 2xPIR

Connection type: Terminal block

Range of sections of wires used [mm²]: 0,75÷1,5

Sensor-operation time [second-minute]: 10-30

sensor working angle [°]: H360/V120

Maximum operating time [min]: 30

Minimum operating time[s]: 10

Maximum power [VA]: 2000

Illumination-level setpoint by which the sensor detects movement [lx]: 3-2000

IP class: 20

Sensor range[m]: max 10

LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 144

Grammage [g]: 201.4

Length of a unit pack [cm]: 11

Width of a unit pack [cm]: 7


Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 10.07

Width of a cardboard box [cm]: 39

26821 SENZO

PIR motion sensor

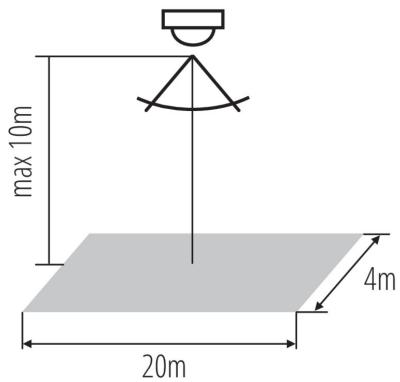**Height of a cardboard box [cm]:** 24**Length of a cardboard box [cm] :** 56**Volume of a cardboard box [m³]:** 0.052416