


33308 L60 11W/M 12 IP65-WW

LED tape

5905339333087



Kanlux L60 LED strip that's two IP rates, IP00 and IP65 - for places where the tape is exposed to moisture. IP65 version, does not differ significantly in size from the IP00 version - this is important when mounting in aluminum profiles. Kanlux L60 tapes very high color rendering factor CRI 90 and up to 3 Years warranty. In addition, the Kanlux L60B version is a 30-meter long roll for those who need longer LED strips.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: only with specific dimmers

PRODUCT PARAMETERS:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 8

Height [mm]: 5000

Depth [mm]: 3

Mercury content: no

Rated voltage [V]: 12 DC

Rated power [W]: 1m = 11

Class of protection against electric shock: III

Diode type: LED SMD

Luminous flux [lm]: 1m = 900

Colour temperature: Warm white

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥30000

Ambient temperature range to which the product can be exposed: 5÷25


Connection type: Free cable ends

IP class: 65

Possibility of cutting LED strips into segments [cm]: 5

33308 L60 11W/M 12 IP65-WW

LED tape

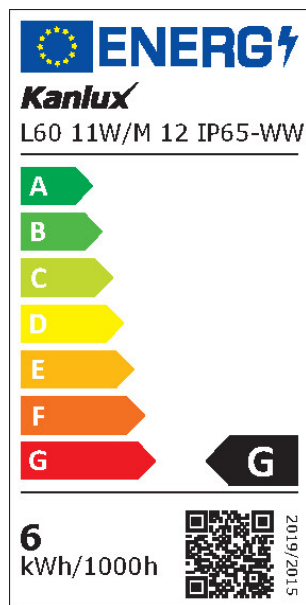

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 0,5m = 6
Energy efficiency class: G
Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 450
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤ 6
On-mode power of the light source P_{on} [W]: 0,5m = 5,5
Colour rendering index: 90
Chromaticity coordinates (x): 0.44
Chromaticity coordinates (y): 0.403
Claim of equivalent power [W]: 0,5m = 38
R9 colour rendering index value: 68
Survival factor: ≥ 0.9
The lumen maintenance factor: 0.96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:


Packaging method: 25
Number of units in the secondary packaging: 25
Number of units in the packaging: 50
Net unit weight [g]: 84
Grammage [g]: 162.8
Length of a unit pack [cm]: 21.5
Width of a unit pack [cm]: 1
Height of a unit pack [cm]: 24
Weight of a cardboard box [kg]: 8.14
Width of a cardboard box [cm]: 34
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm]: 51
Volume of a cardboard box [m³]: 0.050286

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website

33308 L60 11W/M 12 IP65-WW

LED tape

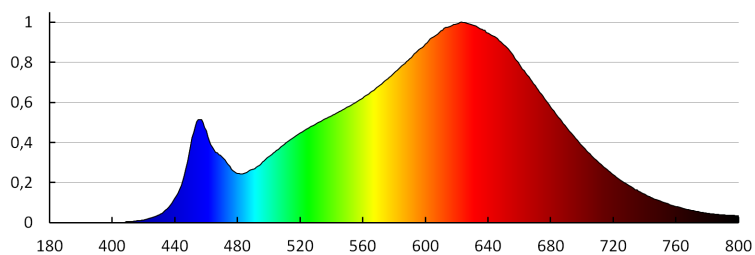

KANLUX S.A. (kat 33308) L60 11W_M 12 IP65-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33308) L60 11W_M 12 IP65-WW
Lamps: 1 x L60 11W_M 12 IP65-WW

