Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33517   XLED ST64 4W-SW

LED light source

5905339335173

1800K SUPER WARM

320°

DECO RI function

Ø64

142

CE   EAC   UKCA   ⊘

A decorative version of a bulb of atypical shape. Kanlux XLED ST64 DECO will help you take care of a cosy atmosphere. All thanks to a very warm colour of the light and an amber glass in which a spiral LED filament is enclosed. This bulb will look beautiful in table lamps, floor lamps or hanging lamps with an open lampshade. It will be a true decoration of your house, café, restaurant and any other place in which you will install it. It is an exceptional combination of a decorative nature, an unusual designer shape and LED energy-efficient technology.

PRODUCT PARAMETERS:

Colour: amber
Compatible with a dimmer: no
Height [mm]: 140
Diameter [mm]: 64
Mercury content: no
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 38
Rated power [W]: 4
Total rated luminous flux [lm]: 250
Rated beam angle [°]: 320
Lampshade material: glass
Light source: ST64
Diode type: LED FILAMENT
Colour temperature: super warm
Cap: E27
Rated lamp-service life [h]: 15000
Number of on/off cycles: ≥25000
Light source shape: standard

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Beam angle [°]: 320

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 4
Useful luminous flux of the light source Φuse [lm]: 250
Useful luminous flux of the light source Φuse [lm]: in sphere (360°)
Correlated colour temperature [K]: 1800
Colour consistency in McAdam ellipses: ≤6
On-mode power of the light source Pon [W]: 4
**Height of the light source [mm]**: 140

EN

33517   XLED ST64 4W-SW

LED light source

Width of the light source [mm]: 64
Depth of the light source [mm]: 64
Colour rendering index: 80
Claim of equivalent power [W]: 25

LOGISTIC DATA:

Packaging method: 10
Number of units in the secondary packaging: 10
Number of units in the packaging: 80
Net unit weight [g]: 44
Grammage [g]: 83.75
Length of a unit pack [cm]: 7
Width of a unit pack [cm]: 7
Height of a unit pack [cm]: 15.5
Weight of a cardboard box [kg]: 6.7
Width of a cardboard box [cm]: 37.5
Height of a cardboard box [cm]: 34
Length of a cardboard box [cm] : 59
Volume of a cardboard box [m³]: 0.075225
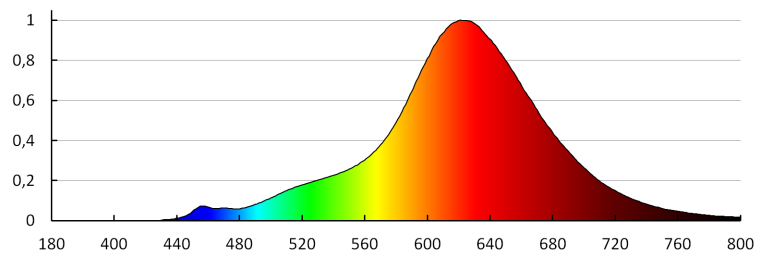
KANLUX S.A. (kat 33517) XLED ST64 4W-SW / **LDC (Polar)**

Luminaire: KANLUX S.A. (kat 33517) XLED ST64 4W-SW
Lamps: 1 x XLED ST64 4W-SW

cd/klm
η = 100%
C0 - C180   C90 - C270

EN