

iQ-LED


Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33728 IQ-LED C37E14 4,2W-WW

LED light source

5905339337283



The Kanlux iQ-LED means photobiological safety and eye-friendly colour temperature and reliability, all in the classic C37 design. iQ-LED bulbs provide full comfort of use and safety.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source : NDLS
Mains or non-mains light source : MLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: white
Compatible with a dimmer: no
Width [mm]: 37
Height [mm]: 102
Depth [mm]: 37
Diameter [mm]: 37
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 40
Rated power [W]: 4.2
Total rated luminous flux [lm]: 470
Rated beam angle [°]: 300
Material: plastic
Lampshade material: plastic
Light source: C37
Diode type: LED SMD
Colour temperature: Warm white
Cap: E14
Rated lamp-service life [h]: 25000
Number of on/off cycles: ≥40000
Light source shape: świeczka
Additional information: Light source (LS)

Date of issue: 02.02.2024, 16:06

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN


iQ-LED

Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

33728 IQ-LED C37E14 4,2W-WW

LED light source

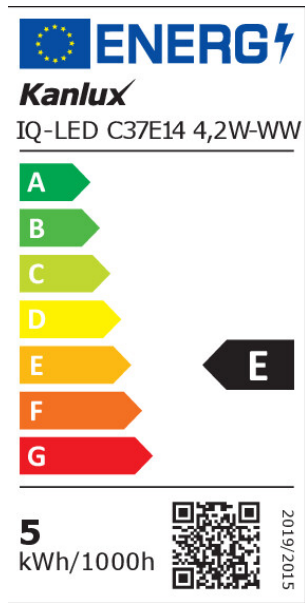

Mercury content: no

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 5

Energy efficiency class: E

Useful luminous flux of the light source Φ_{use} [lm] : 470

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Correlated colour temperature [K] : 2700

Colour consistency in McAdam ellipses : ≤ 6

On-mode power of the light source P_{on} [W] : 4.2

Height of the light source [mm] : 102

Width of the light source [mm] : 37

Depth of the light source [mm] : 37

Colour rendering index: 80

Chromaticity coordinates (x): 0.458

Chromaticity coordinates (y): 0.41

Claim of equivalent power [W]: 40

R9 colour rendering index value : 9

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi_1$): 0,9

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM) : 1,0

Stroboscopic effect metric (SVM) : 0.4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging : 20

Number of units in the packaging : 100

Net unit weight [g] : 20

Grammage [g] : 48.9

Gross unit weight [g] : 34

Length of a unit pack [cm] : 5

Date of issue: 02.02.2024, 16:06


We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN

33728 IQ-LED C37E14 4,2W-WW

LED light source

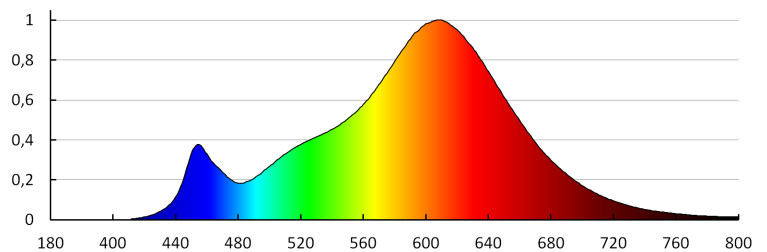Width of a unit pack [cm] : 5**Height of a unit pack [cm] : 11.5****Weight of a cardboard box [kg] : 4.89****Width of a cardboard box [cm] : 27****Height of a cardboard box [cm] : 28.5****Length of a cardboard box [cm] : 55****Volume of a cardboard box [m³] : 0.042323**

KANLUX S.A. (kat 33728) IQ-LED C37E14 4,2W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33728) IQ-LED C37E14 4,2W-WW
Lamps: 1 x IQ-LED C37E14 4,2W-WW