


37010 HRD-LM-WN-B-NT

Linear LED luminaire

5905339370105

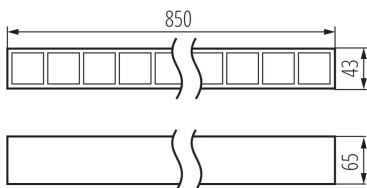

HIERRO is a family of fixtures produced at the Kanlux Factory. The minimalist and elegant form fits into the latest trends in architectural design. The stylish solution is widely used in modern offices, shops, and loft spaces as basic, complementary or accent lighting. The great advantages of HIERRO luminaires are: variety of available control and installation methods, low UGR coefficient, high luminous efficiency, ability to adapt to specific lighting projects and 5-year warranty. This allows you to create energy-saving and modern lighting systems that provide attractive lighting effects.

PRODUCT PARAMETERS:

Colour: black

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: DALI

Fixture lighting direction: down

Length [mm]: 850

Width [mm]: 43

Height [mm]: 65

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 32

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 3650

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X60/Y60

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: louvre / black

Enclosure material: steel, plastic

Connection type: Self-clamping block


Range of sections of wires used [mm²]: 0,5÷2,5

IP class: 20

UGR: <16

37010 HRD-LM-WN-B-NT

Linear LED luminaire

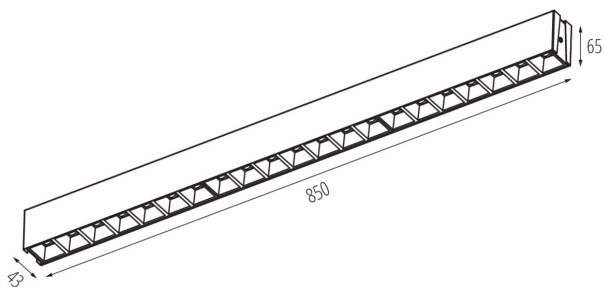

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3500

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 1570

Grammage [g]: 1970

Weight of a cardboard box [kg]: 1.97